

4865 SOUTH STREET

GENERAL NOTES

- 1. ALL RETAINING WALLS OVER 4'-0" NEED PERMIT
- 2. SHOW COMPACTION ON ALL BACKFILLED AREAS
- 3. ALL DIRT RAMPS OVER SIDEWALK ARE TO BE ROAD BASE MATERIAL.
- 4. SURFACE WATER SHALL DRAIN AWAY FROM THE HOUSE AT ALL POINTS. DIRECT THE DRAINAGE WATER TO THE STREET OR TO AN APPROVED DRAINAGE COURSE BUT NOT ONTO NEIGHBORING PROPERTIES. THE GRADE SHALL FALL A MINIMUM OF 6" WITHIN THE FIRST 10'-0".
- 5. BACKWATER VALVES REQUIRED IN ALL NEW RESIDENCES UNLESS IT CAN BE ESTABLISHED THAT A FIXTURE IN THE BASEMENT OR LOWEST LEVEL OF THE HOME IS NOT BELOW THE ELEVATION OF THE UPSTREAM MANHOLE COVER. BACKWATER VALVES MUST BE ACCESSIBLE.

ENGINEER SEAL

REVISIONS

IT IS IMPORTANT FOR THE GENERAL CONTRACTOR TO UNDERSTAND THAT IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE ACCURACY OF THE INFORMATION PROVIDED IN THESE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND COMPLIANCE WITH ALL STATE AND LOCAL CODES AND ORDINANCES. THE PLANS ARE NOT A SURVEY. FIELD VERIFY ALL MEASUREMENTS AND PROPERTY LINE INFORMATION PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND COMPLIANCE WITH ALL STATE AND LOCAL CODES AND ORDINANCES. THE PLANS ARE NOT A SURVEY. FIELD VERIFY ALL MEASUREMENTS AND PROPERTY LINE INFORMATION PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND COMPLIANCE WITH ALL STATE AND LOCAL CODES AND ORDINANCES. THE PLANS ARE NOT A SURVEY. FIELD VERIFY ALL MEASUREMENTS AND PROPERTY LINE INFORMATION PRIOR TO CONSTRUCTION.

4180 WEST STREET

EXIST. DRIVE

EXIST. HOUSE

PROPOSED
ADU

PARKING FOR ADU

NEW SIDEWALK

25.00'

5.00'

21.67'

5.00'

5.00'



SITE PLAN

SCALE: 1" = 10'-0"


THIS IS NOT A SURVEY. FIELD VERIFY ALL MEASUREMENTS AND PROPERTY LINE INFORMATION PRIOR TO CONSTRUCTION.

LAFORTUNE RESIDENCE

4165 WEST 4865 SOUTH
KEARNS, UTAH

SITE PLAN

A-0

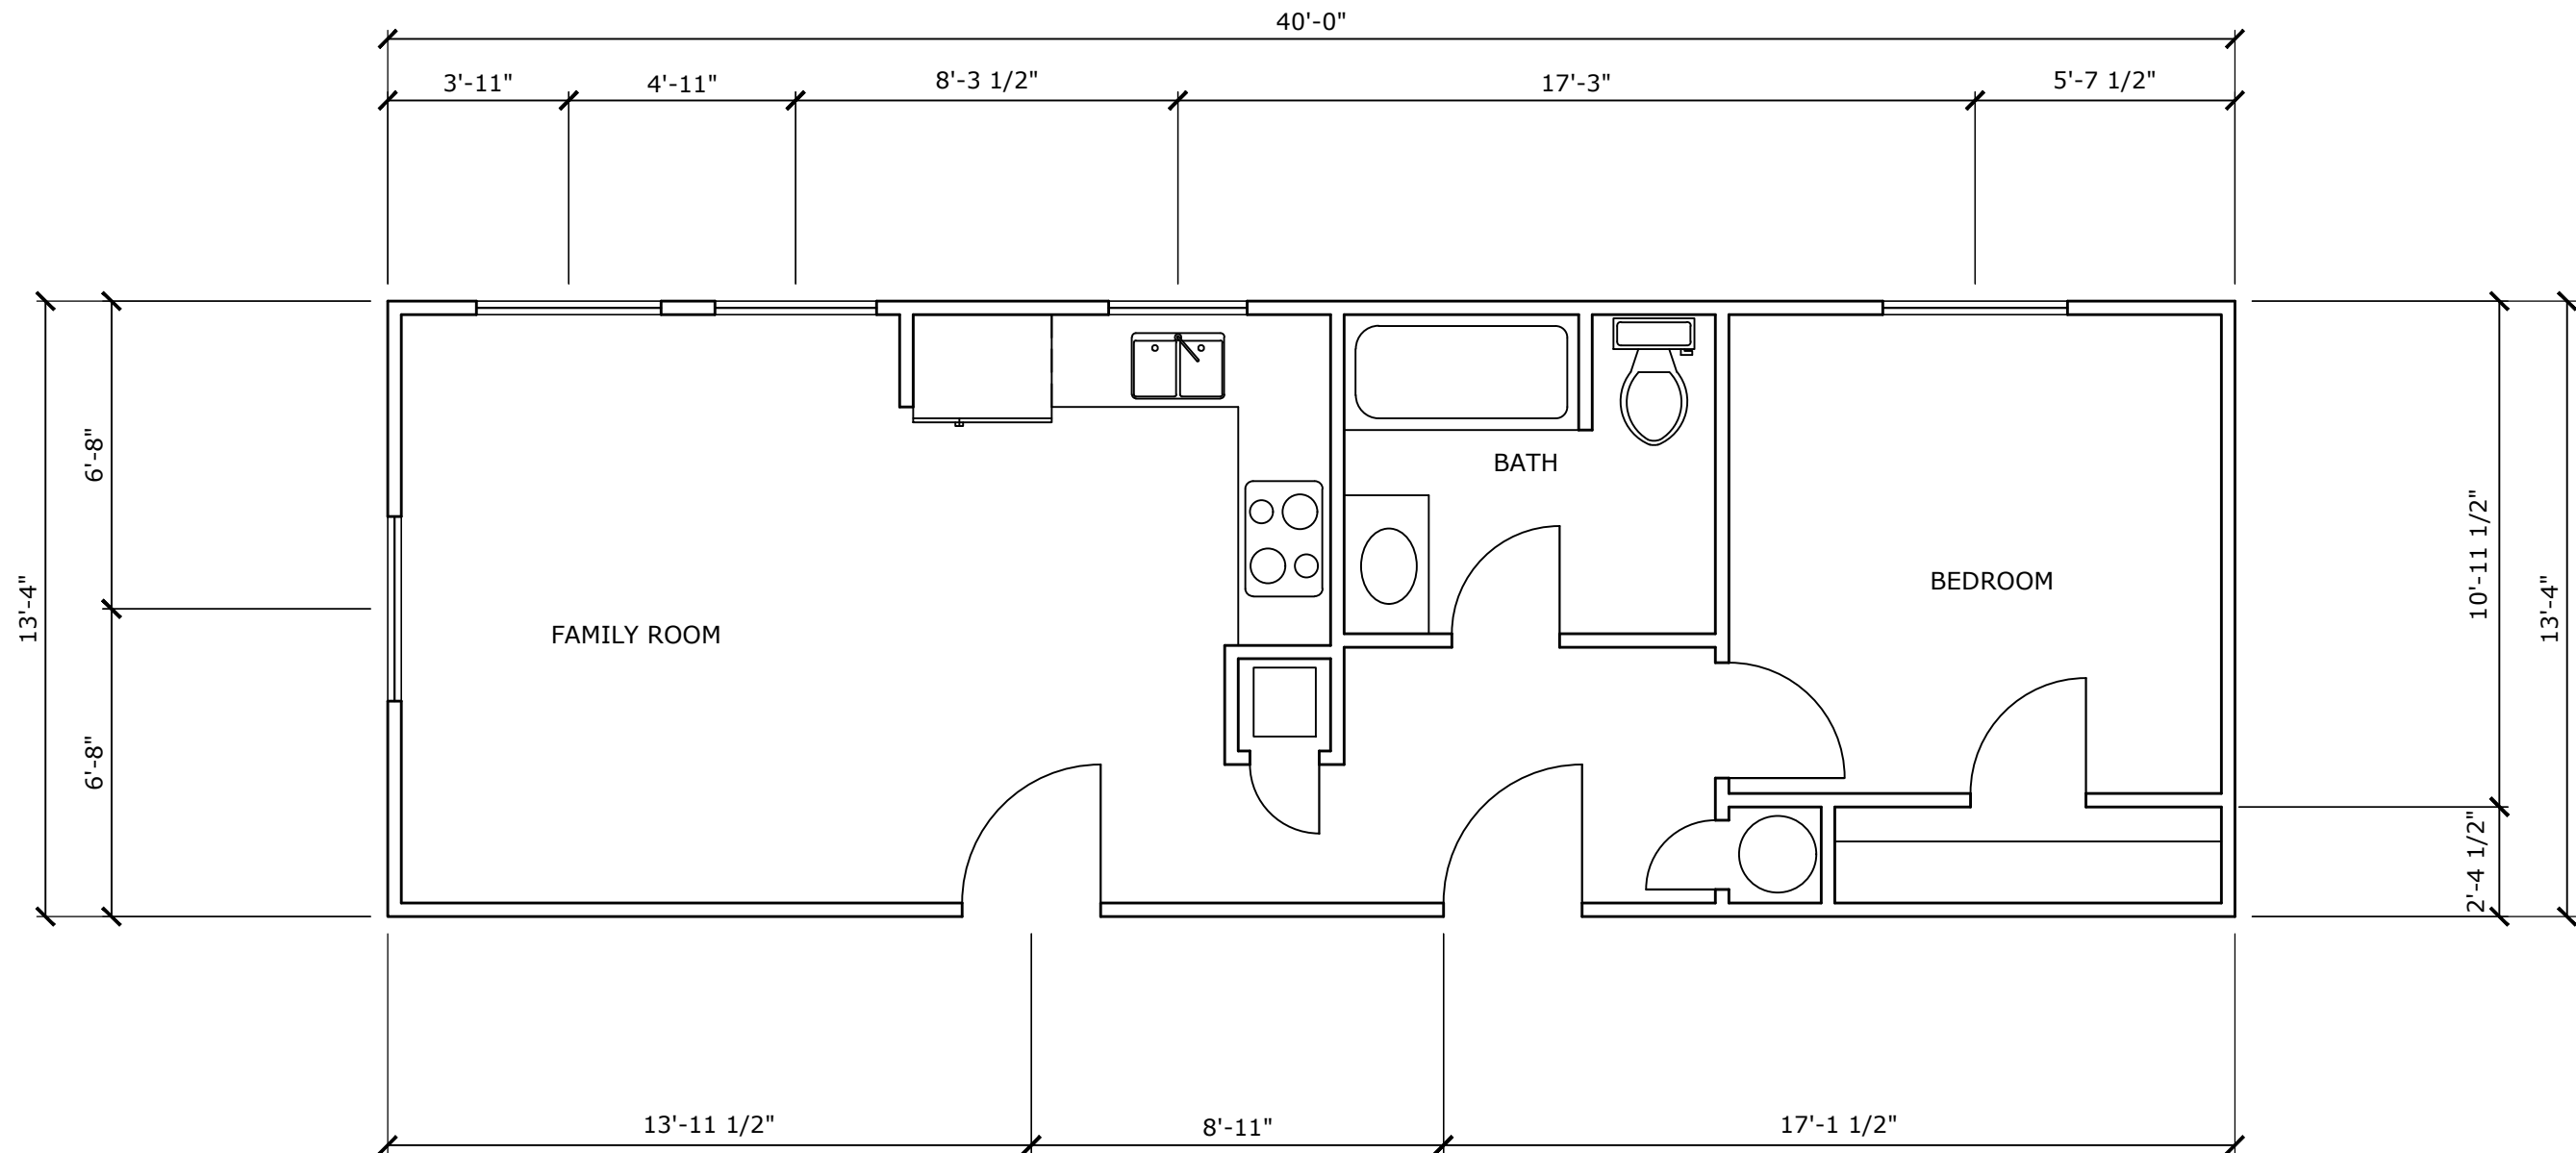

NOTES

1. REFER TO MANUFACTURER PLANS FOR ALL DIMENSIONS
2. REFER TO MANUFACTURER PLANS FOR ALL DOOR AND WINDOW SIZES


MAIN FLOOR PLAN
SCALE: 1/4" = 1'-0"

ENGINEER SEAL


REVISIONS

LAFORTUNE RESIDENCE
4165 WEST 4865 SOUTH
KEARNS, UTAH
FLOOR PLAN

A-1

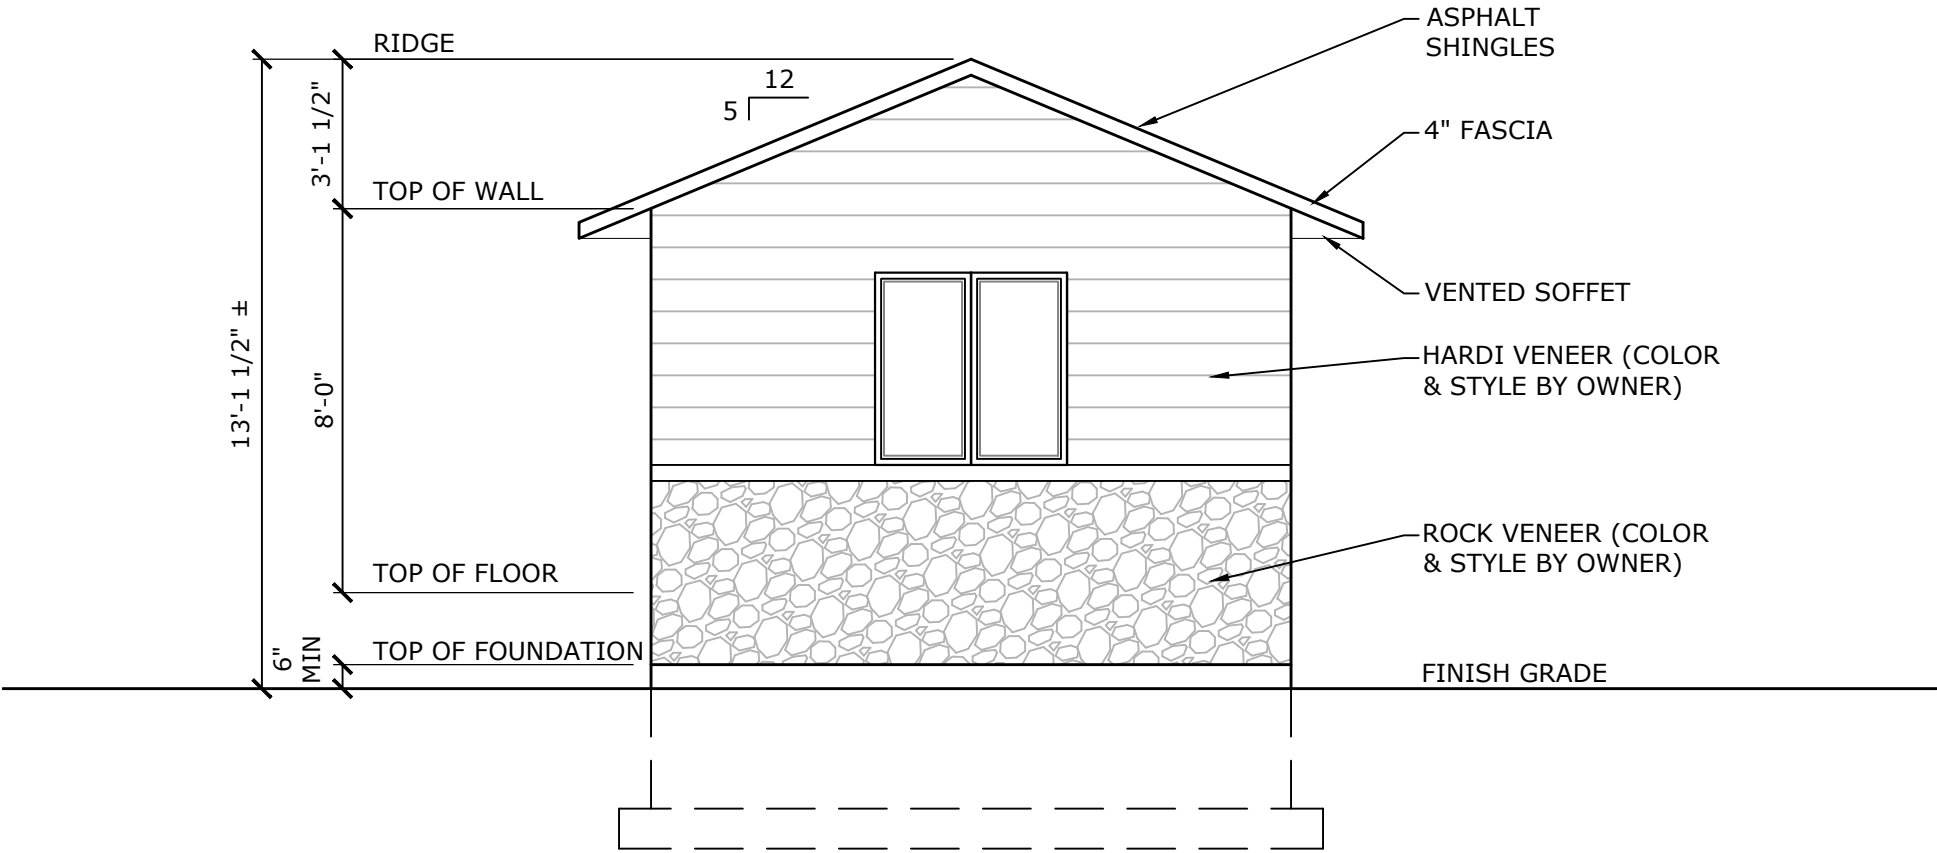

FRONT ELEVATION
SCALE: 1/4" = 1'-0"

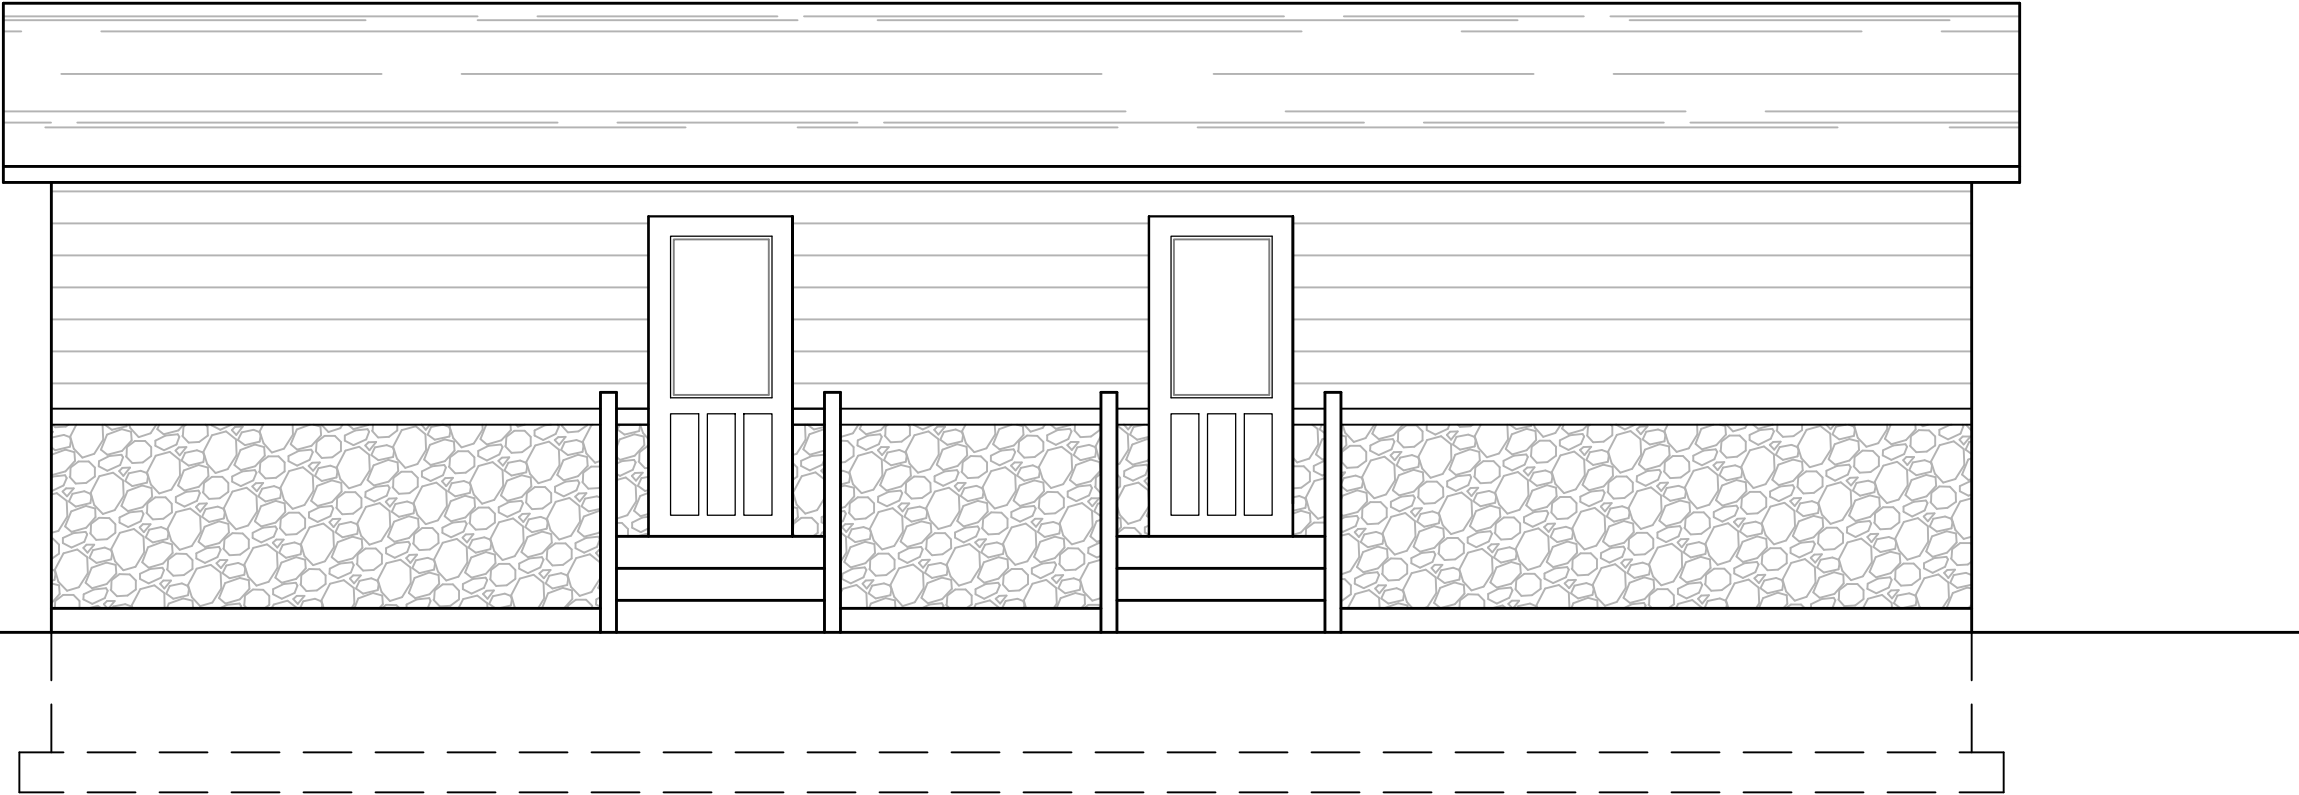

SIDE ELEVATION
SCALE: 1/4" = 1'-0"


ENGINEER SEAL

REVISIONS


LAFORTUNE RESIDENCE
4165 WEST 4865 SOUTH
KEARNS, UTAH

ELEVATIONS

A-2

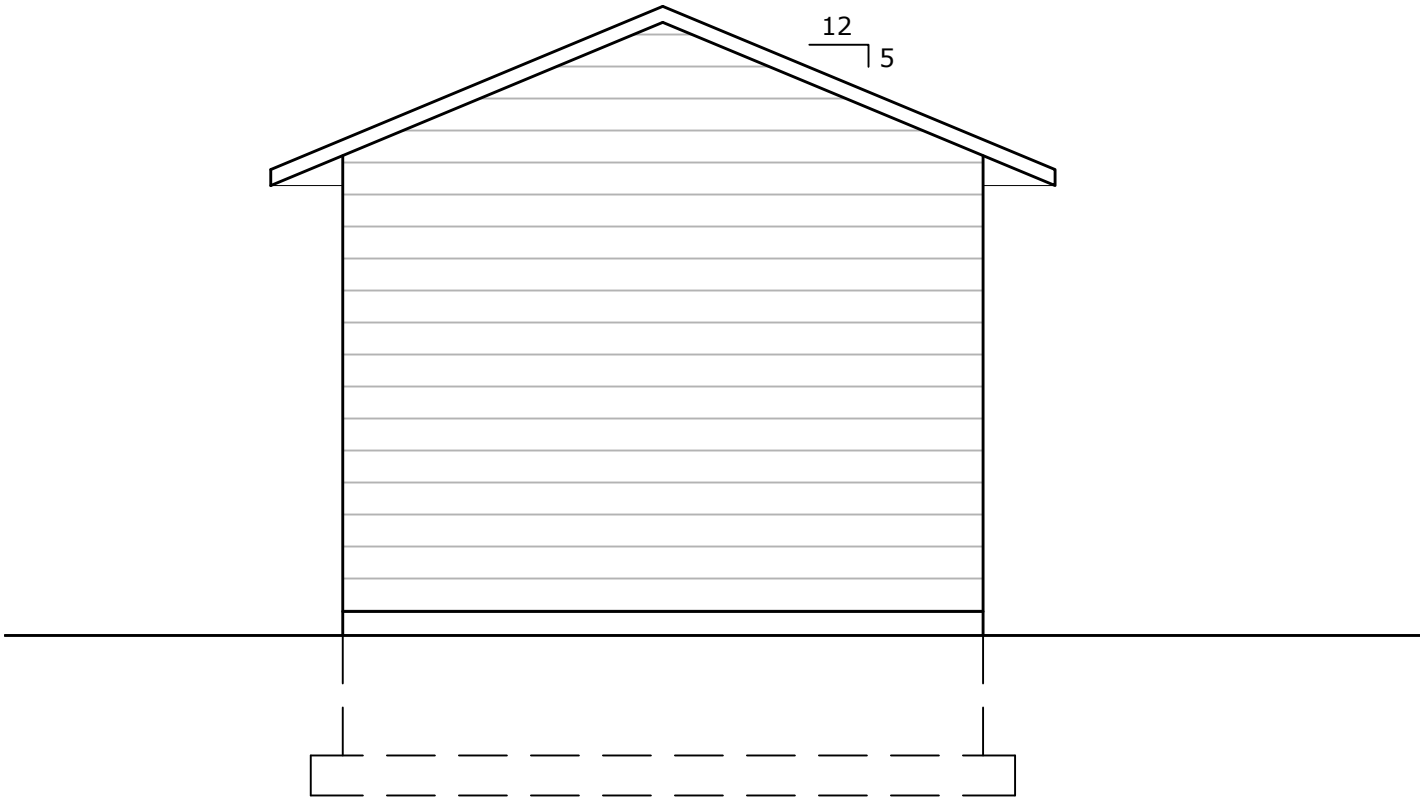

BACK ELEVATION
SCALE: 1/4" = 1'-0"

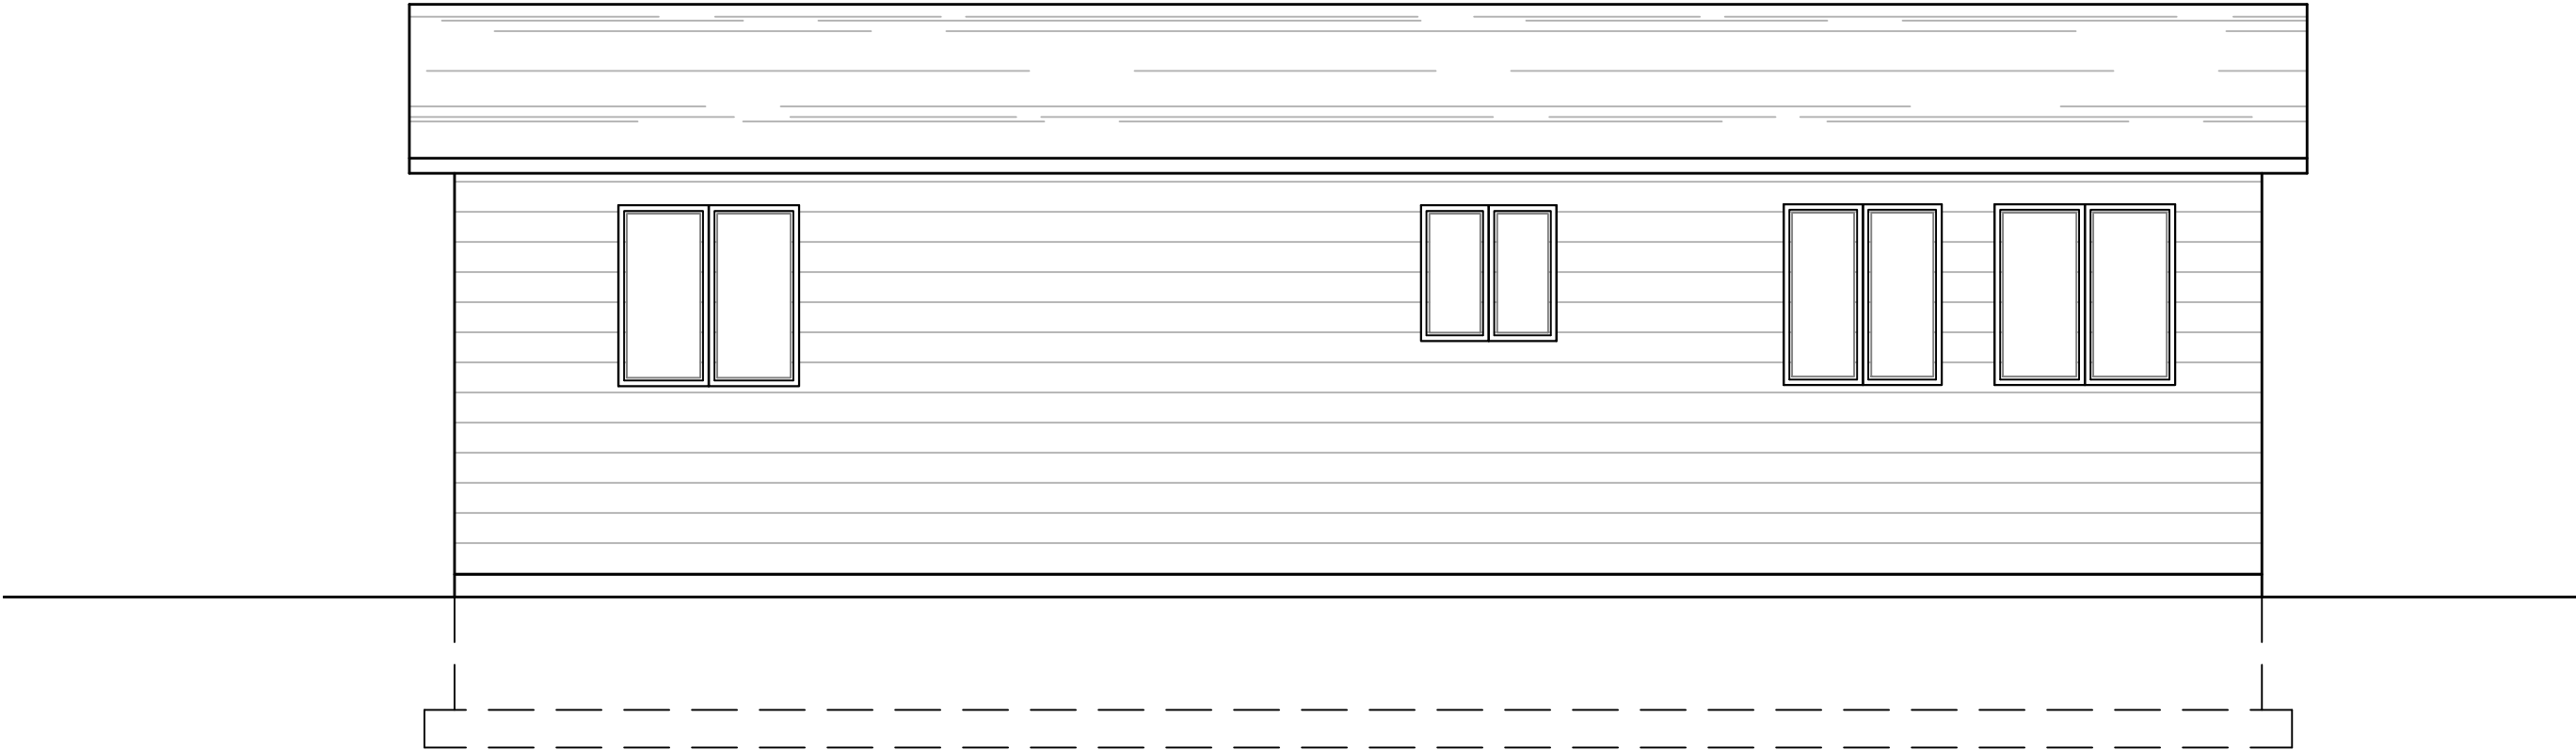

SIDE ELEVATION
SCALE: 1/4" = 1'-0"


ENGINEER SEAL

REVISIONS

LAFORTUNE RESIDENCE
4165 WEST 4865 SOUTH
KEARNS, UTAH

ELEVATIONS


A-3

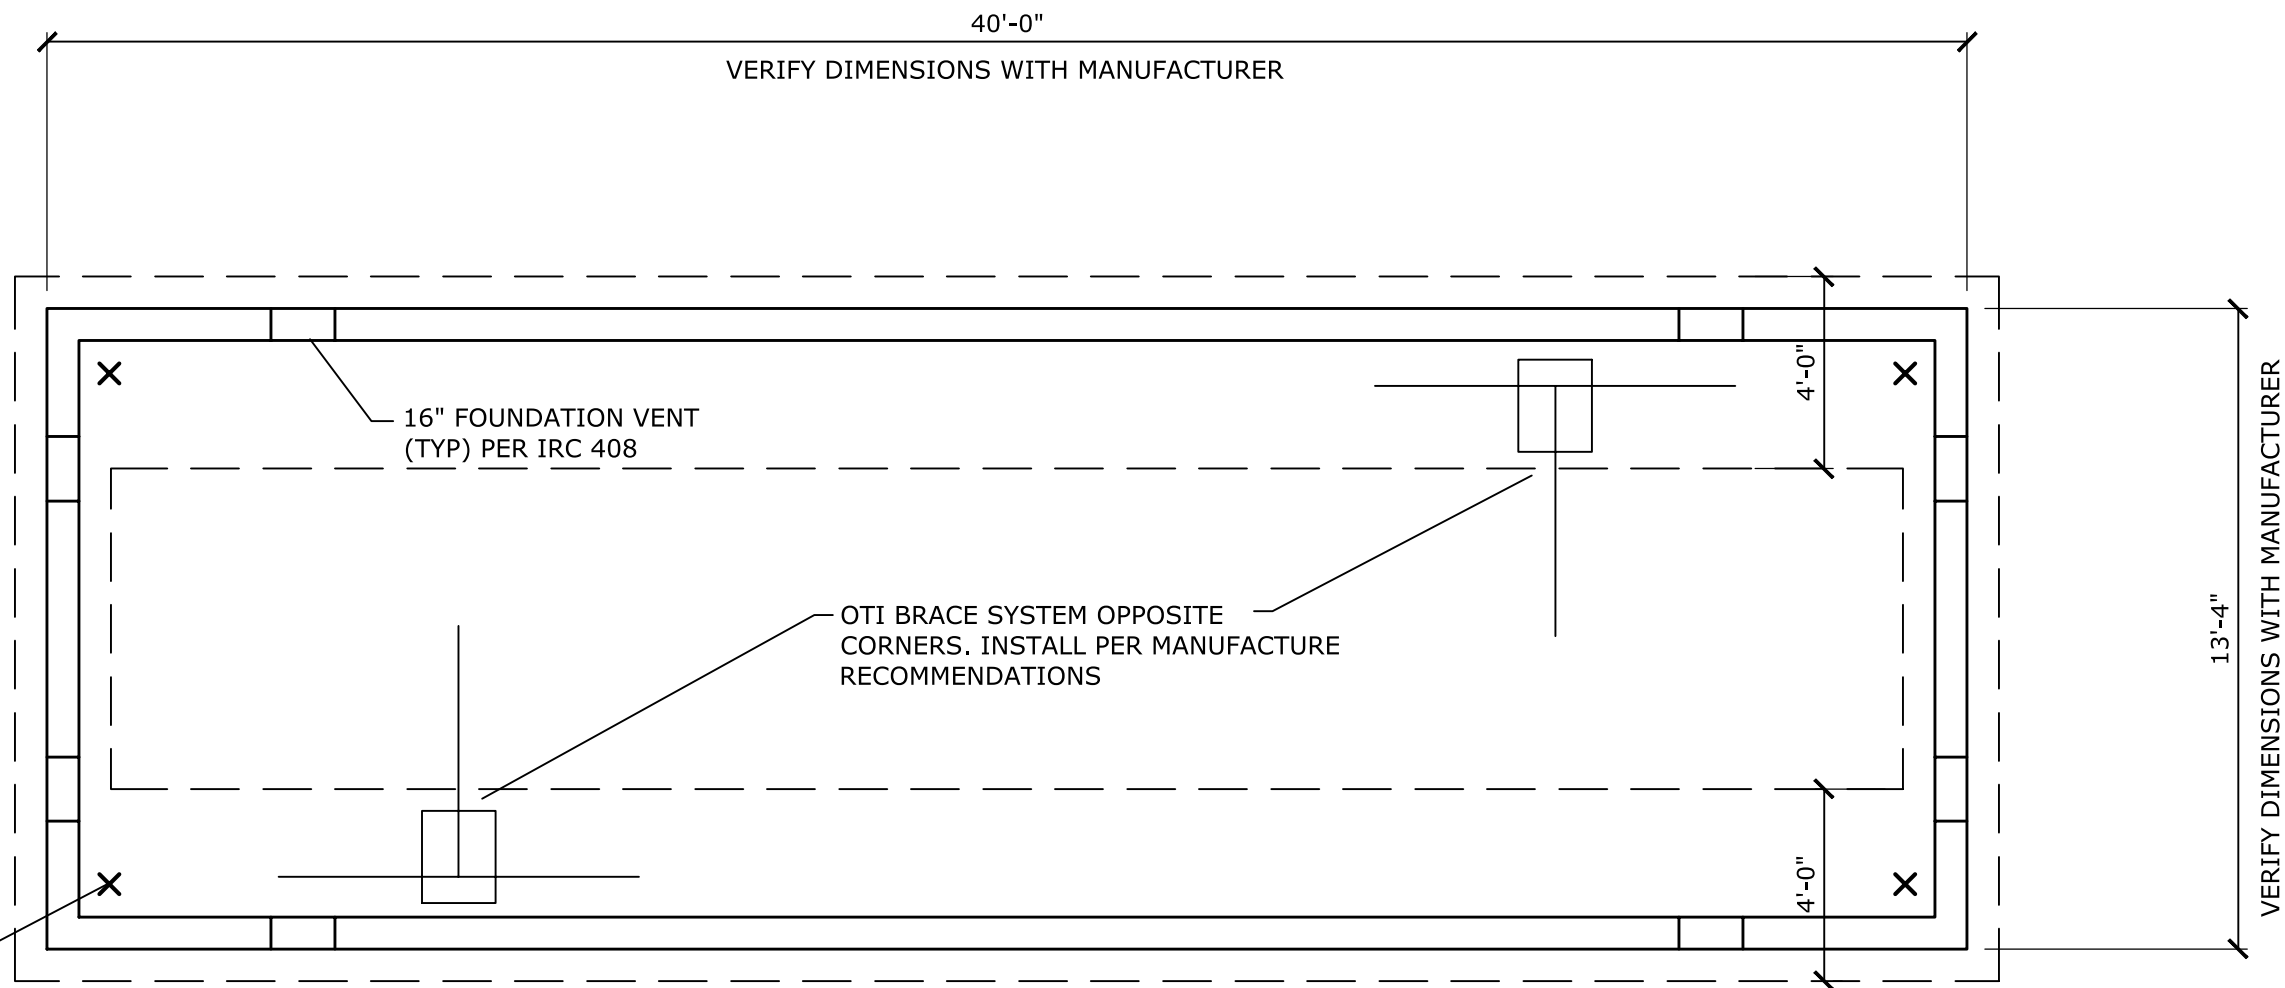

TENSION ANCHOR PER
OLIVER TECHNOLOGY,
EACH CORNER

16" FOUNDATION VENT
(TYP) PER IRC 408

OTI BRACE SYSTEM OPPOSITE
CORNERS. INSTALL PER MANUFACTURE
RECOMMENDATIONS

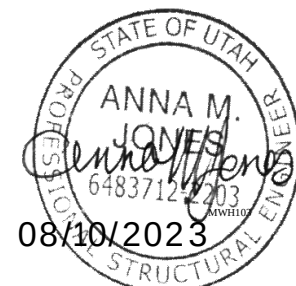

FOUNDATION PLAN
SCALE: 1/4" = 1'-0"

ENGINEER SEAL



REVISIONS

LAFORTUNE RESIDENCE
4165 WEST 4865 SOUTH
KEARNS, UTAH
FOUNDATION PLAN

S-1

GENERAL STRUCTURAL NOTES

- A. GOVERNING CODES
1. 2018 HUD (2021 IRC)
- B. DESIGN LOADS AND CRITERIA
1. DEAD LOAD FLOOR 12PSF; ROOF 15PSF
2. LIVE LOAD FLOOR 40PSF; ROOF 20PSF
3. SNOW Pg = 47PSF Pf = 30PSF
4. WIND = 90MPH; ZONE 1
5. SEISMIC CATEGORY; D
6. SOIL BEARING PRESSURE ASSUMED 1000PSF PER TABLE 3285.202
7. FROST DEPTH 30-INCHES
- C. SITE DRAINAGE
1. ALL DRAINAGE MUST BE DIVERTED AWAY FROM THE HOME AND MUST SLOPE A MINIMUM OF ONE-HALF INCH PER FOOT AWAY FROM FOUNDATION FOR THE FIRST TEN FEET.
2. HOMES LOCATED ON SLOPED SITE MUST BE PROTECTED FROM SURFACE RUNOFF FROM SURROUNDING AREA.
- D. MATERIALS
1. CONCRETE: PORTLAND CEMENT ASTM C150 TYPE I/II; FLY ASH ASTM C618, 10%-25% BY WEIGHT; WATER/CEMENT + FLY ASH = 0.5 MAX; 28 DAY f'c = 3000PSI
2. REINFORCING BARS: ASTM A6015, GRADE 40
- E. FOUNDATION AND CONCRETE
1. PLACE FOOTINGS ON VIRGIN SOILS, COMPACTED NATURAL GRAVELLY SOILS OR ENGINEERED FILL
2. MINIMUM REINFORCING BAR COVER:
i. UNFORMED SURFACES EXPOSED TO EARTH: 3"
3. FORMED SURFACES EXPOSED: 1.5"
3. SPLICE REINFORCEMENT BARS 48 BAR DIAMETERS
4. A MIN CLEARANCE OF 12 INCHES MUST BE MAINTAINED BETWEEN THE LOWEST MEMBER OF THE FRAME AND THE GRADE UNDER ALL AREAS OF THE HOME
5. INSTALL MINIMUM 6 MIL POLYETHYLENE SHEETING OR EQUIVALENT VAPOR RETARDER TO COVER GRAOUND. OVERLAP 12" MIN.
6. THE MINIMUM NET AREA OF VENTILATION OPENINGS MUST NOT BE LESS THAN ONE SQUARE FOOT (FT2) FOR EVERY 1500 SQUARE FOOT OF HOMES FLOOR AREA
7. VENTILATION OPENINGS MUST BE LOCATED AT OPPOSITE SIDES TO PROVIDE CROSS-VENTILATION
8. VENTILATION OPENINGS MUST BE COVERED FOR THEIR FULL HEIGHT AND WIDTH WITH A PERFORATED CORRISION AND WEATHER-RESISTANT COVERING THAT IS DESIGNED TO PREVENT THE ENTRY OF RODANTS.
9. VENTILATION COVERS MUST BE ADJUSTABLE PERMITTING THEM TO BE OPENED AND CLOSED DEPENDING ON CLIMATIC CONDITIONS
10. DRYER VENTS AND COMBUSTION AIR INLETS MUST PASS THROUGH PERIMETER WALL OR SKIRTING TO THE OUTSIDE.
11. WATER RUNOFF FROM THE FURNACE, AIR CONDITIONING, OR WATER HEATER DRAINS MUST BE DIERCTED AWAY FROM UNDER THE HOME.
- F. MANUFACTURED PIERS
1. MANUFACTURED PIERS MUST BE LISTED AND INSTALLED TO THE PIER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
2. METAL PIERS MUST BE PROVIDED WITH PROTECTION AGAINST WEATHER DETERIORATION AND CORROSION. (ZINC COATING OF 0.3 OZ/FT2)
3. PIERS MAY BE OFFSET UP TO 6 IN IN EITHER DIRECTION ALONG THE SUPPORTED MEMBERS TO ALLOW FOR PLUMBING, ELECTRICAL, MECHANICAL, EQUIPMENT, OR OTHER DEVICES.
- G. LATERAL BRACE SYSTEM (OTI)
1. INSTALL BRACE PER MANUFACTURE INSTILLATION INSTRUCTIONS
2. INSTALL THE SYSTEM AT THE SECOND PIER FROM THE END OF THE HOME AND WITHIN A MXIMUM DISTANCE OF 1/4 LENGTH OF HOME
3. INSTALL BOTH LONGITUDINAL AND TRANSVERSE SYSTEM
- H. WOOD FRAMING
1. FRAMING CONNECTORS, ANCHORS AND HANGERS SHOWN ON THE DRAWINGS ARE PRODUCTS OF SIMPSON STRONG-TIE. FOLLOW MANUFACTURE RECOMMENDATIONS FOR INSTILLATION.
2. WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED.
3. FASTENERS IN PRESERVATIVE TREATED & FIRE RETARDANT TREATED WOOD SHALL BE HOT DIPPED ZINC-COATED GALVANIZED STEEL OR STAINLESS STEEL.

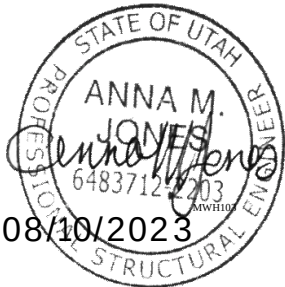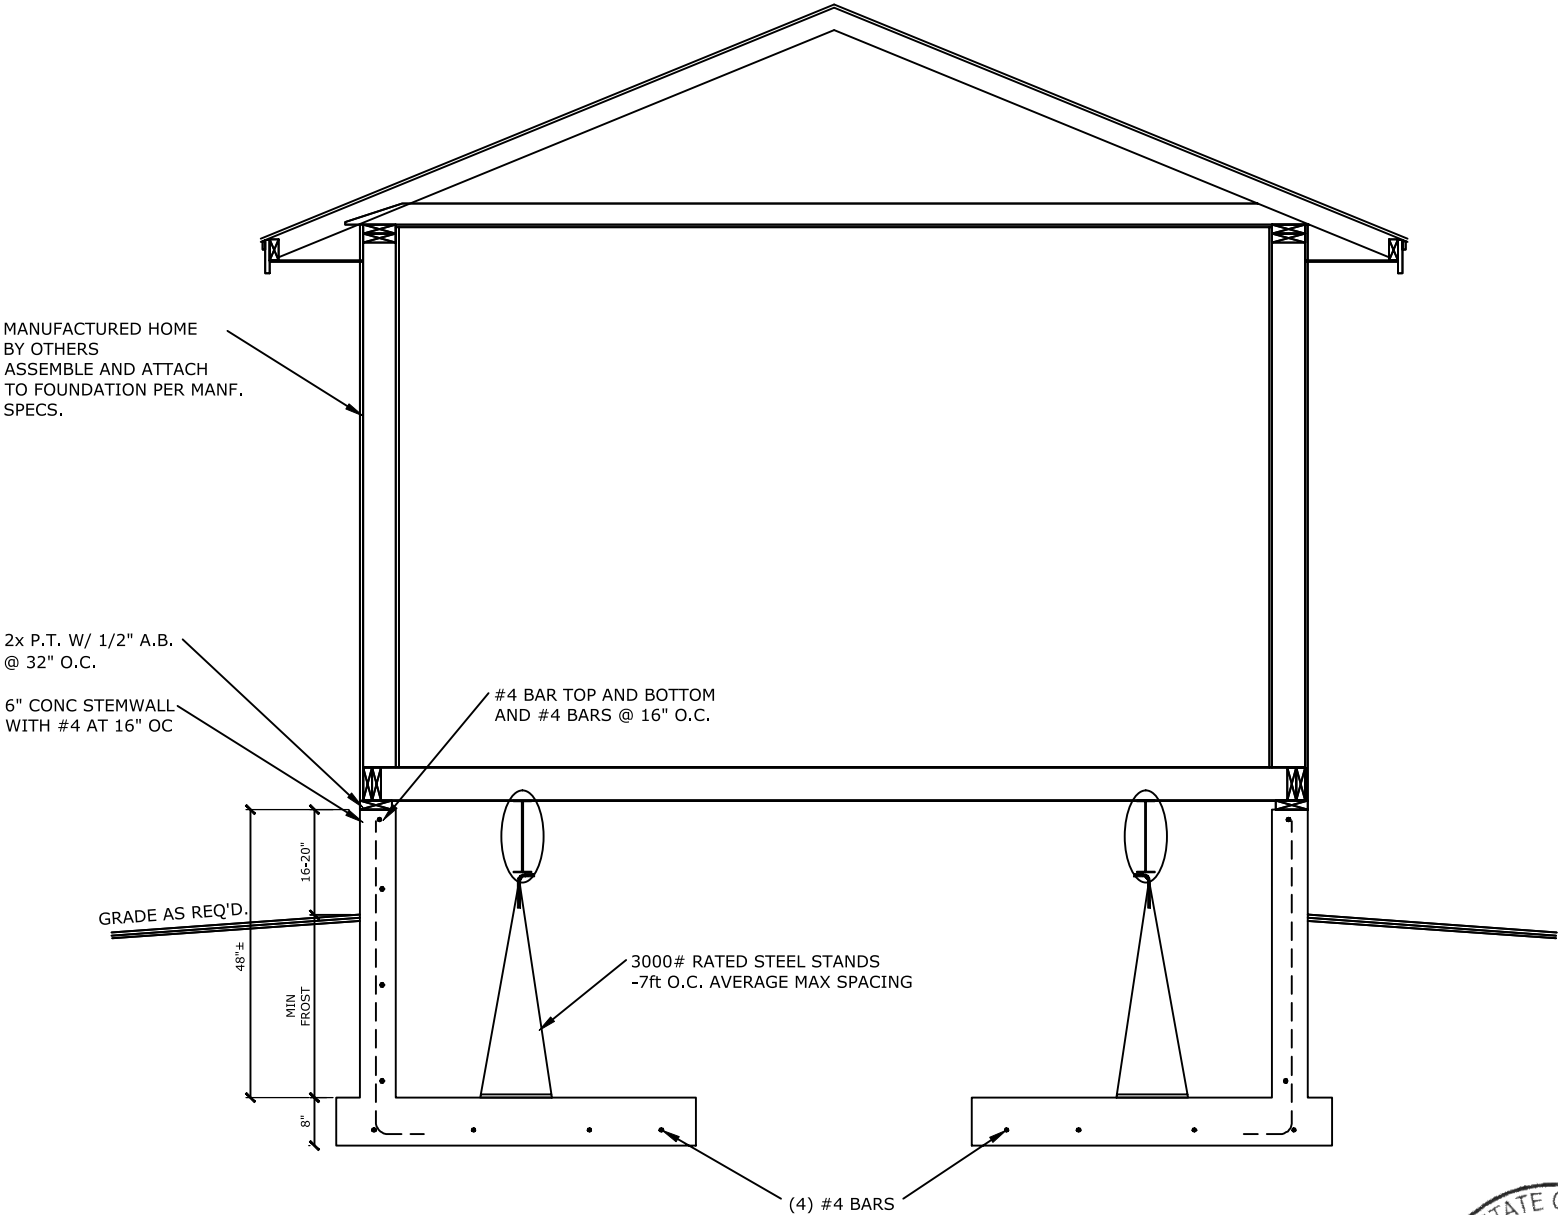

ENGINEER SEAL

REVISIONS

LAFORTUNE RESIDENCE
4165 WEST 4865 SOUTH
KEARNS, UTAH
SITE PLAN

S-2